

ideal  
louvres

## Small Format Weather Louvre

EWB40 Series

### Product Overview

Idealair EWB40 external weather louvres are ideal for intake or exhaust applications. Blades are mounted at 45 degrees in a perimeter frame and overlap to ensure good protection against water ingress. Bird screen is fitted to all louvres as standard.

### Construction

Frames and blades are manufactured from extruded aluminium. The frame mitres are mechanically jointed and welded on the rear and neck for added strength and rigidity preventing any distortion of the hairline mitres. Standard bird screen is galvanised wire with cell sizes of 13mm.

### Size Range

Preferred sizes for the EWB40 series are available for next working day. Please enquire for details.

150mm x 150mm	400mm x 400mm
200mm x 200mm	450mm x 450mm
250mm x 250mm	500mm x 500mm
300mm x 300mm	550mm x 550mm
350mm x 350mm	600mm x 600mm

### Placing an order

Example Product Code					
EWB40	0150	0150	NOM	N	SA

Series	Size mm*		Dimensional Selection		Fixing		Finish	
	Width	Height						
EWB40	0150	0150	NOM	Nominal opening size	N	No fixing (standard)	SA	Satin Anodised
	0600	0600						

\*Sizes in 50mm increments

When ordering please state requirement from each column: Series, Size, Dimensional Selection, Fixing & Finish.



### Fixing


Louvre is supplied with no fixing as standard and applied by others.

**N** - No fixing provided (fixing by others)

### Finish

**SA** - Satin Anodised (Standard)

**Independently tested to EN13030 for water penetration.**

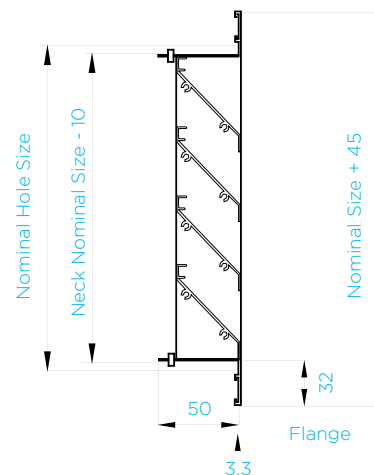

All measurements in millimetres (mm).

\*Blade pitch variance based on size.

Call to inquire.